



(51) International Patent Classification: G01N 27/26, G01N 27/447	A1	(11) International Publication Number: WO 00/42423
		(43) International Publication Date: 20 July 2000 (20.07.2000)

(21) International Application Number:	PCT/US00/00793
(22) International Filing Date:	12 January 2000 (12.01.2000)
(30) Priority Data:	60/115,588 12 January 1999 (12.01.1999) US
(60) Parent Application or Grant	SPECTRUMEDIX CORPORATION [/]; (). LIU, Changsheng [/]; (). LI, Qingbo [/]; (). LIU, Changsheng [/]; (). LI, Qingbo [/]; (). ABRAMS, Samuel, B. ; ().

Published

(54) Title: COPOLYMERS FOR CAPILLARY GEL ELECTROPHORESIS

(54) Titre: COPOLYMERES DESTINES A L'ELECTROPHORESE CAPILLAIRE EN GEL

(57) Abstract

This invention relates to an electrophoresis separation medium having a gel matrix of at least one random, linear copolymer comprising a primary comonomer and at least one secondary comonomer. The primary comonomer is an acrylamide or an acrylamide derivative that provides the primary physical, chemical, and sieving properties of the gel matrix. The at least one secondary comonomer imparts an inherent physical, chemical, or sieving property to the copolymer chain. The desired properties incorporated by the secondary comonomer are hydrophilicity, hydrophobicity, copolymer chain stiffness, stability of copolymer entanglement structure, resistance to hydrolysis, processivity of copolymer chain extension, gel matrix viscosity, affinity of the copolymer to the surface of a supporting substrate, chirality, or a mixture thereof. The gel matrix has a viscosity of between about 1,500 to about 20,000 Cp, and between about 100,000 to 5,000,000 Daltons.

(57) Abrégé

La présente invention concerne un milieu de séparation par électrophorèse comprenant une matrice de gel constituée d'au moins un copolymère linéaire aléatoire comprenant un comonomère primaire et au moins un comonomère secondaire. Le comonomère primaire est un acrylamide ou un dérivé d'acrylamide qui confère à la matrice de gel les propriétés primaires physiques, chimiques et de criblage. Le ou les comonomères secondaires confèrent à la chaîne de copolymère les propriétés intrinsèques physiques, chimiques et de criblage. Les propriétés désirées conférées par le comonomère secondaire sont l'hydrophilicité, l'hydrophobicité, la raideur de la chaîne de copolymère, la stabilité de la structure d'enchevêtrement du copolymère, la résistance à l'hydrolyse, l'aptitude au traitement de l'allongement de la chaîne du copolymère, la viscosité de la matrice de gel, l'affinité du copolymère à la surface d'un substrat porteur, la chiralité ou un mélange de ces propriétés. La matrice de gel présente une viscosité comprise entre environ 1500 et environ 20 000 Cp et les copolymères linéaires aléatoires ont des poids moléculaires compris entre environ 100 000 et 5 000 000 Daltons.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : G01N 27/26, 27/447	A1	(11) International Publication Number: WO 00/42423 (43) International Publication Date: 20 July 2000 (20.07.00)
(21) International Application Number: PCT/US00/00793 (22) International Filing Date: 12 January 2000 (12.01.00) (30) Priority Data: 60/115,588 12 January 1999 (12.01.99) US (71) Applicant (for all designated States except US): SPEC- TRUMEDIX CORPORATION [US/US]; 2124 Old Gatesburg Road, State College, PA 16803 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): LIU, Changsheng [CN/US]; Apartment 106, 425 Waupelani Drive, State College, PA 16801 (US). LI, Qingbo [CN/US]; Apartment 4, 804 Stratford Drive, State College, PA 16801 (US). (74) Agents: ABRAMS, Samuel, B. et al.; Pennie & Edmonds LLP, 1155 Avenue of the Americas, New York, NY 10036 (US).	(81) Designated States: CA, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.	
(54) Title: COPOLYMERS FOR CAPILLARY GEL ELECTROPHORESIS		
(57) Abstract This invention relates to an electrophoresis separation medium having a gel matrix of at least one random, linear copolymer comprising a primary comonomer and at least one secondary comonomer. The primary comonomer is an acrylamide or an acrylamide derivative that provides the primary physical, chemical, and sieving properties of the gel matrix. The at least one secondary comonomer imparts an inherent physical, chemical, or sieving property to the copolymer chain. The desired properties incorporated by the secondary comonomer are hydrophilicity, hydrophobicity, copolymer chain stiffness, stability of copolymer entanglement structure, resistance to hydrolysis, processivity of copolymer chain extension, gel matrix viscosity, affinity of the copolymer to the surface of a supporting substrate, chirality, or a mixture thereof. The gel matrix has a viscosity of between about 1,500 to about 20,000 Cp, and between about 100,000 to 5,000,000 Daltons.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Description

5

10

15

20

25

30

35

40

45

50

55

COPOLYMERS FOR CAPILLARY GEL ELECTROPHORESIS

RELATED APPLICATIONS

The present application claims priority to U.S. Provisional Patent Application No. 60/115,588, filed January 12, 1999.

TECHNICAL FIELD

This invention relates to an electrophoresis separation medium that can be flexibly optimized by combining multiple required features into one polymeric gel matrix via random copolymerization of selected multiple monomers.

BACKGROUND OF THE INVENTION

The movement of a molecule with a net charge in an electric field is known as electrophoresis. Electrophoresis is a powerful means of separating biological molecules such as proteins, peptides, oligonucleotides, RNA and DNA. The velocity of migration (v) of a molecule in an electric field depends on the electric field strength (E), the net charge of the protein (z), and the frictional coefficient (f), as shown in the equation:

$$v = \frac{Ex}{f}$$

Two primary separating mechanisms exist: (i) separations based on differences in the effective charge of the analytes, and (ii) separations based on molecular size. Separations based on differences in the effective charge are usually limited to low or moderate molecular weight molecules since high molecular weight molecules have effective charges that are similar, making it difficult to separate them. Separations based on molecular size are generally referred to as molecular sieving and are conducted using gel matrices that have controlled pore sizes. In these separating systems, if the effective charges of the analytes are the same, the separation results from differences in the abilities of the different sized molecular species to penetrate through the gel matrix. Smaller molecules move more quickly relative to larger ones through a gel of a given pore size.

5 In theory, separation of different proteins could be achieved readily in free
solution provided that the molecules differed sufficiently in their charge densities. In
practice, separations in free solutions are difficult to achieve because the heat produced
during electrophoresis can cause convection disturbances which distort the protein bands.
10 As a result, band broadening occurs and protein resolution is compromised. For this reason,
5 electrophoresis in free solution is rarely practiced.

Various support media are used to minimize convection and diffusion, such
as paper or cellulose acetate, agarose, starch and polyacrylamide. Paper, cellulose acetate,
15 and similar porous materials are relatively inert, serve mainly for support and to minimize
convection, and separation of proteins is based largely on the charge density of the proteins
20 at a specific pH.

Starch, agarose and polyacrylamide gels are the preferred media for
conducting electrophoretic separations. These gels not only minimize convection and
diffusion, but also actively participate in the separation process. More specifically, these
25 materials provide a restrictive medium where molecular sieving occurs, and provides
separation on the basis of both charge density and molecular size. Polyacrylamide-based
gels are widely used because they are chemically inert, have excellent sieving
characteristics, and have high resolution capabilities. However, polyacrylamide-based gels
30 have high viscosity, may form air bubbles that affect separation, have a short shelf life, are
neurotoxic, and are cumbersome to prepare.

Electrophoresis may be carried out using slab gels, which typically run
several samples in parallel lanes. Large samples of DNA are required, and detection of the
35 DNA typically occurs after the electrophoretic separation is complete. Advantages of this
technique include the ease of post-separation sample collection, the ability to compare
results of multiple samples on the same gel, and the ability to separate large amounts of
25 DNA. However, slab gel electrophoresis can be labor-intensive and slow.

Alternatively, capillary electrophoresis (CE) permits rapid, high resolution
separation of molecules. CE typically involves the separation of charged molecules in a
narrow capillary with on-line detection by either absorbance or laser-induced fluorescence.
45 Typically, CE employs fused silica capillary tubes whose inner diameters are between 50
microns to 200 microns, and have lengths ranging from 10 cm to 100 cm or more. These
capillaries can be coated, typically with polyacrylamide, or left uncoated. The coating

5 prevents electroosmotic flow, a phenomenon which frequently occurs in
electrophoretic separations of solute ions dissolved in a solvent or solvent system. This
phenomenon causes bulk flow of the solvent system in response to the applied electric field.
The bulk flow impairs the separation of solutes since it causes mobilization of all solutes at
10 a common rate as part of the solution in which they are dissolved. This effectively shortens
the path of travel attributable to electrophoresis, and thereby lessens the degree of
electrophoretic separation for a column of a given length.

15 Crosslinked polymers, such as polyacrylamide and other high viscosity
media, are not suitable for CE since the high viscosity makes replacement of the gel in the
capillary an impractical matter. Separation also takes a longer period of time using
crosslinked polymers when compared to low viscosity media.

20 Linear polyacrylamide ("LPA") is a highly effective separation medium that
has excellent sieving properties due to its entanglement structure. Furthermore, the absence
of crosslinking in a linear polymer gives it lower viscosity. In order to use LPA in CE, the
capillary inner wall must be coated with a hydrophilic polymer to suppress
25 electroosmotic flow in order to achieve expected separation performance. Coating the
inner surface of capillary walls to prevent electroosmosis is known. For example, U.S.
Patent No. 5,545,302 discloses the suppression of electroosmotic flow in CE by the
use of amine-derivatized polymers. U.S. Patent No. 5,552,028 discloses the suppression of
30 electroosmotic flow in CE by the use of N,N'-disubstituted or N-monosubstituted
polyacrylamides, which have self-coating properties. These amine-derivatized polymers
were prepared by modifying the functional groups of a pre-existing homopolymer to impart
the desired self-coating characteristic. U.S. Patent No. 4,997,537 discloses a silane-
derivatized coating covalently bonded to the inner surface of a microcapillary wall, a thin
25 layer of a hydrophilic polymer absorbed on the layer of the coating material, and a
polyacrylamide gel filling the tube.

40 Other polymers, such as poly(ethylene oxide), poly(dimethylacrylamide)
(U.S. Patent Nos. 5,567,292 and 5,552,028), and poly(vinylpyrrolidone) (Gao *et al.*,
Analytical Chem., 1998, 70, 1383-1388) are able to suppress electroosmotic flow
during DNA separation in uncoated capillaries. However, none of these polymers has been
35 shown to surpass the performance of linear polyacrylamide in the aspects of DNA
sequencing read length and capability of high speed separation at elevated temperature.

5 The use acrylamide derivatives to synthesize polymeric gel matrices is known (Sassi *et al.*, Electrophoresis, 1996, 17, 1460; U.S. Patent No. 5,470,916; and Lindberg *et al.* Electrophoresis, 1997, 18, 2909). Gel Matrices synthesized from these acrylamide derivatives usually have significant physical, chemical, and electrophoretic properties from polyacrylamide.

10 The use of copolymers in electrophoresis media to enhance performance are known. For example, U.S. Patent No. 4,997,537 discloses the use of a copolymer of polyacrylamide and a crosslinker, such as N,N'-methylenebisacrylamide, in microcapillary gel electrophoresis. U.S. Patent Nos. 4,948,480 and 5,149,416 disclose gel electrophoresis media composed of a water-soluble copolymer of an acrylamide monomer with another comonomer that facilitates crosslinking via a crosslinking agent. U.S. Patent 5,759,369 discloses an electrophoresis separation medium composed of a copolymer containing a linear hydrophilic polymer segment having uniform segment length and hydrophobic polymer segments at each end. These copolymers may have one of the following structures: i) comb or tuft copolymer structure; ii) block copolymer structure; and iii) star copolymer structure, but none are random copolymers. Liang *et al.* (Electrophoresis, 1998, 19, 2447-2453) discuss capillary electrophoresis using a non-crosslinked triblock polymer.

20 Despite the great amount of effort which has gone into improving conventional electrophoresis separation media, there is a need for new polymeric media that incorporate specific properties to overcome general problems associated with electrophoretic separations, and to enhance electrophoresis separation performance in various applications. What is also desirable is an electrophoresis gel medium for coated and uncoated capillaries that is capable of resolving DNA fragments comprising 500 to 1000 base pairs.

SUMMARY OF THE INVENTION

40 This invention relates to an electrophoresis separation medium having a gel matrix of at least one random, linear copolymer comprising a primary comonomer and at least one secondary comonomer, wherein the comonomers are randomly distributed along the copolymer chain. The primary comonomer is an acrylamide or an acrylamide derivative that provides the primary physical, chemical, and sieving properties of the gel matrix. The at least one secondary comonomer imparts an inherent physical, chemical, or sieving

5 property to the copolymer chain, and primary and secondary comonomers are present in a ratio sufficient to induce desired properties that optimize electrophoresis performance.

10 The desired properties incorporated by the secondary comonomers are hydrophilicity, hydrophobicity, copolymer chain backbone stiffness, stability of copolymer entanglement structure, resistance to hydrolysis, processivity of copolymer chain extension, 5 gel matrix viscosity, affinity of the copolymer to the surface of a supporting substrate, chirality, or a mixture thereof.

15 Preferably, the ratio of reactivity of the at least one secondary to primary comonomer is between about 0.3 to about 2. The gel matrix generally has a viscosity of 10 between about 1500 to about 20,000 Cp, and the linear random copolymers have molecular weights of between about 100,000 to 5,000,000 Daltons.

20 The present invention also relates to a method of preparing an electrophoresis separation medium containing a gel matrix of at least one random, linear copolymer comprising contacting a primary and at least one secondary comonomer in the 15 presence of a copolymerization initiator in an aqueous medium having a pH of between about 5 to about 11 at a temperature and time sufficient to copolymerize the comonomers and form a linear, random copolymer. Contacting the random, linear copolymer in a buffer 25 forms the gel matrix.

30 The present invention also relates to a capillary tube filled with the electrophoresis separation medium described herein, and to a method of separating a 20 mixture of biological molecules by placing into a support the electrophoresis separation medium described herein, adding the mixture of biological molecules to the electrophoretic separation medium at one end of the support; and applying an electric field to the medium 35 having a strength sufficient to facilitate the migration and separation of the biological 25 molecules.

40 BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 illustrates the viscosity of acrylamide-co-dimethylacrylamide copolymers as a function of the weight fraction of acrylamide (AAm).

45 30 FIGURE 2 illustrates the relative hydrophilicity of acrylamide-co-dimethylacrylamide copolymers as a function of the weight fraction of acrylamide (AAm).

FIGURE 3 is the schematic drawing of a capillary electrophoresis apparatus

5 with laser induced fluorescence detection.

FIGURE 4 illustrates the #1 color electrophorogram of the electrophoretic separation of PGEM/U DNA samples. The # 1 color consists mostly of fluorescence from the G fragments in the DNA sequencing samples.

DETAILED DESCRIPTION OF THE INVENTION

10 5 This invention relates to gel matrices for use as electrophoresis separation media. These gel matrices contain random copolymers that may be synthesized to have
15 desired properties to further optimize electrophoresis performance. The prior art does not teach the use of random copolymers as sieving components for gel electrophoresis media.
20 Furthermore, the prior art does not teach the use of gel electrophoresis media containing random copolymers that can be strategically synthesized to fine tune its physical, chemical, and sieving properties.

25 15 The term "monomer" as used herein is defined as a molecule or compound usually containing carbon, of relatively low molecular weight, and simple structure that is capable of conversion to polymers by combination with itself or other similar molecules or compounds.

30 The term "polymer" as used herein is defined as a macromolecule formed by the chemical union of two or more identical monomers.

20 The term "copolymer" as used herein is defined as a polymer that is made up of more than one dissimilar monomers.

35 The expression "random copolymer" as used herein is defined as a copolymer that is made up of more than one monomer, in which different monomer units are distributed along a copolymer chain in no specific pattern. Unless stated otherwise, the
25 term "copolymer" refers to random copolymers.

40 The expression "linear copolymer" as used herein is defined as copolymers that are not crosslinked.

45 30 The expression "random, linear copolymer" as used herein is defined as a copolymer that is made up of more than one monomer, in which different monomer units are distributed along a copolymer chain in no specific pattern, and the copolymer is not crosslinked with other copolymers.

5 The expression "block copolymer" as used herein is defined as a high molecular weight polymer where each monomer forms homopolymer segments and different homopolymer segment types are linked together.

10 The random copolymer is composed of a primary comonomer and at least one other secondary comonomer. The expression "primary comonomer" as used herein is defined as the comonomer that gives the copolymer chain its basic sieving properties.

15 The expression "secondary comonomer" as used herein is defined as a comonomer, other than the primary comonomer, that incorporates a desired property into the targeted random copolymer being synthesized.

20 The term "support" as used herein is defined as any device that functions to contain gel matrices for use in electrophoresis separations and defines a path through which an electrophoretically separated sample migrates.

25 The term "reactivity" as used herein is defined as the probability that a given monomer is added to a growing copolymer chain in the presence of other types of monomers.

30 The random copolymers of the claimed invention are sieving components used to separate biomolecules, for example, proteins, nucleic acids, peptides, and the like, by slab gel electrophoresis, capillary electrophoresis, isoelectric focusing, electrophoresis on micromachined channels, or capillary electrophoresis on a chip technology. The capillary electrophoresis can be performed in either coated or uncoated capillaries. The random copolymers are neutral or ionic and has low intrinsic fluorescence.

35 The random copolymers of the claimed invention are strategically synthesized by selecting specific comonomers to form a targeted linear copolymer. The random copolymers are composed of at least two or more comonomer types. The ratio of comonomers can be continuously adjusted to optimize the properties for electrophoretic separation. The ratio of comonomers may be any ratio that provides the desired properties of the random copolymer. The comonomers must be water soluble. Typically, there is a primary comonomer that gives the random copolymer chain its primary physical, chemical, and sieving properties. Preferably, the primary comonomer is an acrylamide or an acrylamide derivative where it contains between 3-24 carbon atoms, is saturated or unsaturated, and is substituted or unsubstituted. Examples of acrylamide derivatives include, but are not limited to, N,N-dimethacrylamide, N,N-dimethylmethacrylamide, N-

5 ethylmethacrylamide, N-ethylacrylamide, N-methylacrylamide, N-methylmethacrylamide,
and methacrylamide. The primary comonomers are available commercially or by simple
derivatization of monomer units.

10 The secondary comonomers are selected for their inherent properties that
5 may be incorporated into the copolymer chains. These inherent properties include, but are
not limited to, one or more of hydrophilicity, hydrophobicity, self coating properties,
copolymer chain backbone stiffness, stability of copolymer entanglement structure at
15 different temperature and electric fields, resistance to hydrolysis, processivity of copolymer
chain extension, gel matrix viscosity, affinity of the copolymer to the surface of a suitable
10 supporting substrate, such as a coating layer on the inner surface or exposed bare surface of
a capillary tubing, and chirality. The preferred inherent properties of the secondary
comonomers are hydrophilicity, hydrophobicity, viscosity, and self coating properties. The
20 selection of the secondary comonomers and the ratio of secondary comonomers to primary
comonomer are based on predetermined desired properties of the targeted random
15 comonomer.

25 At least one secondary comonomer may be copolymerized with the primary
comonomer to form a random copolymer, wherein each comonomer unit is distributed
along the copolymer chain in no specific order, and the ratio of the reactivity of the primary
comonomer to the secondary comonomers is between about 0.3 to about 2. The reactivity is
30 the probability that a given monomer is added to a growing copolymer chain in the presence
of other types of monomers. Formation of the random copolymers is not limited to the
copolymerization of one secondary comonomer with the primary comonomer. More than
one secondary comonomer may be present in the formation of the random copolymers.
35

The present invention is further realized by forming a gel matrix that contains a
25 copolymer formed from a first comonomer and at least a second comonomer having a
reactivity of about 0.3 to about 2. When multiple monomers are utilized, the ratio of
reactivities of all the secondary comonomers is between about 0.3 to about 2. It is
presumed that the reactivity is correlated with the chemical structure of the comonomers.
Thus, one can choose suitable secondary comonomers based on chemical structure alone.
40

45 30 In another embodiment, the secondary comonomer or comonomers are vinyl
monomers, monomers of acrylamide derivatives, monomers of acryloyl derivatives,
monomers of acrylic acid derivatives and mixtures thereof. Preferably, the secondary

comonomers are vinyl monomers, monomers of acrylamide derivatives, monomers of acryloyl derivatives, monomers of acrylic acid derivatives, monomers of polyoxides, monomers of polysilanes, monomers of polyethers, monomers of derivatized polyethylene glycols, monomers of cellulose compounds, and mixtures thereof, each having between 2-24 carbon atoms, is saturated or unsaturated, and is substituted or unsubstituted. More preferably, the secondary comonomers are acrylamide, methacrylamide, N-acryloylmorpholine, N-allylacrylamide, N-allylmethacrylamide, N-benzylacrylamide, N-benzylmethacrylamide, N-(iso-butoxymethyl)acrylamide, N-(iso-butoxymethyl) methacrylamide, N-(tert-butyl)acrylamide, N-tert-butylmethacrylamide, N-cyclohexylacrylamide, N-cyclohexylmethacrylamide, N,N-diethylacrylamide, N,N-diethylmethacrylamide, N-[2-(N,N-dimethylamino)ethyl] acrylamide, N-[2-(N,N-dimethylamino)ethyl]methacrylamide, N-[3-(N,N-dimethylamino)propyl]acrylamide, N-[3-(N,N-dimethylamino)propyl]methacrylamide, N,N-dimethylacrylamide, N-methylmethacrylamide, N-methylacrylamide, N-ethylacrylamide, N-ethylmethacrylamide, N-phenylacrylamide, N-phenylmethacrylamide, N,N-diphenylacrylamide, N,N-diphenylmethacrylamide, N,N-dodecamethylenebisacrylamide, N-dodecylacrylamide, N-dodecylmethacrylamide, N-(2-hydroxypropyl)acrylamide, N-(2-hydroxypropyl)methacrylamide, N,N-methylenebismethacrylamide, N-methylolacrylamide, N-methylolmethacrylamide, N-propylacrylamide, N-propylmethacrylamide, N-isopropylacrylamide, N-isopropylmethacrylamide, N-butylacrylamide, N-butylmethacrylamide, N-isobutylacrylamide, N-isobutylmethacrylamide, vinyl acetate, vinylacetic acid, vinylbenzyl alcohol, vinylcyclohexane, N-vinyl formamide, 1-vinyl-2-pyrrolidinone, vinyl acetonitrile, vinyl acrylate, vinyl 4-tert-butylbenzoate, N-vinylcaprolactam, vinyl crotonate, vinylcyclopentane, vinyl decanoate, vinyl carbonate, vinyl 2-ethylhexanoate, 1-vinylimidazole, vinyl methacrylate, 2-vinylnaphthalene, 2-vinylpyridine, 4-vinylpyridine, vinyl sulfone, ethylene glycol vinyl ether, 1,6-hexanediol vinyl ether, N-vinylphthalimide, vinyl pivalate, 1-vinyl-2-pyrrolidinone, vinyl trifluoroacetate, and 4,4'-vinylidenebis(N,N-dimethylaniline), or mixtures thereof.

The random copolymers are synthesized by copolymerization of comonomers using methodology well known to those of ordinary skill in the art. The preferred method of copolymer synthesis is free-radical solution polymerization. Any free radical initiator well known to those of ordinary skill in the art may be used, including, but

not limited to, peroxy compounds, azoalkanes, photochemical homolysis, biradicals, tin hydrides, alkyl amines, and heat. Preferably, the free radical initiator is a peroxy compound, an azoalkane, or alkylamine.

Typical polymerization initiators known to those of ordinary skill in the art can be used in the present invention. For instance, these initiators may be capable of generating free radicals. Suitable polymerization initiators include both thermal and photoinitiators. Suitable thermal initiators include, but are not limited to, ammonium persulfate/tetramethylethylene diamine, 2,2'-azobis-(2-amidino propane) hydrochloride, potassium persulfate/dimethylaminopropionitrile, 2,2'-azobis(isobutyronitrile), 4,4'-azobis-(4-cyanovaleric acid), and benzoylperoxide. Preferred thermal initiators are ammonium persulfate/tetramethylethylenediamine and 2,2'-azobisisobutyronitrile ("AIBN"). Suitable photoinitiators include, but are not limited to, isopropylthioxantone, 2-(2'-hydroxy-5'-methylphenyl)benzotriazole, 2,2'-dihydroxy-4-methoxybenzophenone, and riboflavin. When using the combination of persulfate and tertiary amine, the persulfate is preferably added prior to the addition of the non-aqueous medium, since persulfate is much more soluble in water than in non-aqueous dispersing media. More preferably, the free radical initiator is N,N,N',N'-tetramethylethylene-diamine ("TEMED"), or AIBN.

Other methods of synthesizing the copolymers of the present invention are described in Goetzinger, W., *et al.*, Electrophoresis, 1998, 19, 242-249 (inverse emulsion polymerization); and Sassi, A., *et al.*, Electrophoresis, 1996, 17, 1460-1469 (suspension polymerization and precipitation polymerization).

In the present invention, the copolymerization process is done in the absence of crosslinking agents, to form linear, non-crosslinked copolymers. All copolymers are dissolved in the same bulk solution prior to copolymerization and each comonomer unit along the synthesized chain is distributed in a random fashion. There are no well-defined blocks of comonomer units as a result of the random distribution. However, the placement of each comonomer unit along the chain results in a uniform distribution of each comonomer unit. The copolymer is a linear random copolymer having molecular weights of between about 100,000 to 5,000,000 Daltons. Typically, the copolymerization process is done at temperatures between about 0°C to about 80°C. Preferably, the copolymerization process is done at temperatures between about 5°C to about 40°C. More preferably, the copolymerization process is done at temperatures between about 15°C to 30°C.

5 The copolymerization process is carried out in the presence of an inert
atmosphere and in the absence of oxygen, which may be facilitated by freeze-thaw, vacuum
degassing, gas purging by bubbling the reaction solution, or other methods known to those
of ordinary skill in the art. Typical gases that may be used include, but are not limited to,
10 helium, argon, and nitrogen. Vacuum degassing or helium gas purging are the preferred
5 methods of removing oxygen content. Typically, vacuum degassing was applied for about
30 minutes to 2 hours, and helium gas purging was done for about 1.5 hours to about 3
hours.

15 The method of preparing the gel matrices for electrophoresis may be done by
10 dispersing pre-polymerized linear random copolymers of this invention in a given volume
of aqueous medium, and mixing thoroughly by suitable means, e.g., vortexing, gentle
shaking, or mechanical stirring. Typically, the matrix is allowed sit for 3 to 24 hours after
20 mixing to insure complete dissolution of the material. Preferably, the matrix is allowed to
sit for 5 to 15 hours, and more preferably 10 to 12 hours. The pre-polymerized linear
15 random copolymers may be formed by polymerizing the comonomers in either aqueous
buffer or water using methodology well known to those of ordinary skill in the art, and
25 filtering to yield the isolated product. The pre-polymerized linear random copolymers may
also be isolated by extraction methods known to those of ordinary skill in the art, and
subsequent removal of the solvent.

30 In another embodiment, the method of preparing gel matrices for
20 electrophoresis involves controlling chemical, physical and sieving properties by the
judicial selection of specific primary and secondary comonomers, and careful control of the
comonomer ratios and reaction conditions.

35 In another embodiment, the method of preparing the gel matrices for
25 electrophoresis involves copolymerization of desired amounts of the comonomers in a
aqueous solution having a pH between about 5 to about 11 at a sufficient temperature,
40 pressure and time to yield a gel matrix that is ready for use in electrophoresis separations.
When the aqueous solution is water, the pH is preferably between about 5 to about 8. When
the aqueous solution is a buffer, the pH is preferably between about 7 to about 9. The
45 30 buffer solutions of the present invention include aqueous solutions, organic solutions, or
mixtures thereof. Selection and incorporation of a suitable buffer is well known to those of
ordinary skill in the art and is dependent upon the materials to be separated by the

5 electrophoresis process in which the medium containing the copolymer is employed. Such
buffers that may be selected and are commonly used are described, for example, in Andreas
Chrambach, "The Practice of Quantitative Gel Electrophoresis," VCH Publishers, Deerfield
Beach, FL, (1985), and U.K. Laemmli, *Nature*, 227:680, (1970). Preferred buffer systems
10 5 are tris(hydroxymethyl) aminomethane ("Tris")/borate/ethylenediaminetetraacetic acid
("EDTA"), Tris/acetate/EDTA, Tris/phosphate/EDTA, and Tris/glycylglycine/EDTA.
Other additives in the buffer may also be present, such as formamide or urea. More
preferably, the buffer is a Tris/borate/EDTA, formamide solution or a Tris/borate/EDTA,
15 urea buffer solution. Typically, urea concentrations in these buffer solutions are between
about 3 M to about 10 M, Tris concentrations are between about 50 mM to about 150 mM,
10 and EDTA concentrations are between about 0.1 mM to 100 mM. Preferably, the urea
concentrations in these buffer solutions are between about 5 M to about 8 M, the Tris
concentrations are between about 70 mM to about 120 mM, and the EDTA concentrations
20 are between about 0.5 mM to 20 mM. More preferably, the urea concentrations in these
buffer solutions are between about 6 M to about 7 M, the Tris concentrations are between
15 about 80 mM to about 100 mM, and the EDTA concentrations are between about 1 mM to
about 5 mM.

The concentration of the random copolymers in the gel matrix is any
quantity which provides retention times in electrophoretic separations of the sample
30 molecules such that effective separation on the basis of molecular size and/or charge is
achieved. This concentration will vary with respect to the parameters of the separation
system, including, for example, the column configuration and length; the effect of other
factors influencing the separation, such as charge and electrophoretic mobility; the
35 molecular structure; intrinsic viscosity; the interactive character of the polymer itself; and
the range of and differences between the molecular weights of the sample molecules.
25 Typically, the concentration of the random copolymers in the gel matrix is from about 0.01
to about 10.0 weight percent. Preferably, the concentration of the random copolymers in
the gel matrix is from about 2 to about 5 weight percent. More preferably, the concentration
40 of the random copolymers in the gel matrix is from about 3 to about 4 weight percent.

30 The secondary comonomer can be selected to impart viscosity properties into
a copolymer chain. In the copolymer, the ratio of secondary comonomer with inherent
viscosity properties to primary comonomer is any ratio that results in the desired viscosity

5 of the gel matrix. The control of viscosity is an important property that affects many
aspects of gel electrophoresis. For example, high viscosities in gel matrices often make it
difficult to fill and flush capillary tubes. An important advantage of the present invention is
the flexible optimization of viscosity such that a gel matrix has a low enough viscosity that
10 enables easy filling and flushing of capillary tubes. This allows the user to easily change
the gel matrices to suit a particular system or separation. The desired viscosity may also be
fine tuned to avoid low viscosities that are susceptible to temperature or electric field
gradients when temperature or electric field changes in the system occur. These gradients
15 cause poor resolution and separation performance. Furthermore, low viscosities causes gel
matrices in non-horizontal capillaries to flow downwards due to gravitational forces,
20 thereby causing poor separation of biological molecules.

The viscosities of the random copolymer gel matrices were measured by the
falling-ball method, one which is well known to those of ordinary skill in the art (R. L.
Daugherty, J. B. Franzini, and E. J. Finnermore, "Fluid Mechanics with Engineering
15 Applications," 8th edition, McGraw-Hill, Inc., p. 401, 1985). Typically, the viscosities of
the gel matrices is between about 10 to about 100,000 Cp, preferably, between about 500 to
25 about 50,000 Cp, and more preferably between about 1500 to about 20,000 Cp.

The secondary comonomer can be selected to impart hydrophilicity into a
copolymer chain. In the copolymer, the ratio of secondary comonomer with inherent
30 hydrophilicity to primary comonomer is any ratio that results in the desired hydrophilicity
of the gel matrix. One advantage of controlling the hydrophilicity of a gel matrix is to
ensure DNA, protein, and peptide solubility, which subsequently facilitates high levels of
35 separation performance, including complete resolution of the components in a sample,
reproducibility, and accuracy.

25 The secondary comonomer can be selected to impart self coating properties
into a copolymer chain. In the copolymer, the ratio of secondary comonomer with inherent
self coating properties to primary comonomer is any ratio that results in the desired self
40 coating properties of the gel matrix. One advantage of controlling self coating properties is
it suppresses electroendosmotic flow when using uncoated capillaries for electrophoretic
45 separations

30 The present invention also relates to a capillary tube filled with an
electrophoresis separation medium comprising a gel matrix of at least one random, linear

5 copolymer. The copolymer comprises a primary comonomer and at least one secondary
comonomer, wherein the comonomers are randomly distributed along the copolymer chain.
The primary comonomer is an acrylamide or an acrylamide derivative that provides the
10 primary physical, chemical, and sieving properties of the gel matrix. The at least one
5 secondary comonomer imparts an inherent physical, chemical, or sieving property to the
copolymer chain, and the ratio of reactivity of the at least one secondary to primary
comonomer is between about 0.3 to about 2. The primary and secondary comonomers are
15 present in a ratio sufficient to induce desired properties that optimize electrophoresis
performance. The desired properties incorporated by the secondary comonomers are
10 hydrophilicity, hydrophobicity, copolymer chain backbone stiffness, stability of copolymer
entanglement structure, resistance to hydrolysis, processivity of copolymer chain extension,
20 gel matrix viscosity, affinity of the copolymer to the surface of a supporting substrate,
chirality, or a mixture thereof. The gel matrix has a viscosity of between about 1500 to
about 20,000 Cp, and the linear random copolymers have molecular weights of between
15 about 100,000 to 5,000,000 Daltons.

25 This invention also relates to a method of separating biological molecules,
for example, proteins, nucleic acids, peptides, and the like, by electrophoretically passing
these molecules through a gel matrix containing the random copolymers of the present
30 invention. These steps include placing a gel matrix of random, linear copolymers in a
20 support, adding the mixture of biological molecules to the electrophoretic separation
medium at one end of the support, and applying an electric field to the medium having a
strength sufficient to facilitate the migration and separation of the biological molecules.
35 The support has two spaced apart regions having a path in which a voltage differential may
be applied to cause samples to migrate within the gel matrix. Preferably, the separation of
25 biological molecules is done by using the random copolymers of the present invention in
slab gel electrophoresis, capillary electrophoresis, isoelectric focusing, electrophoresis on
40 micromachined channels, or capillary electrophoresis on a chip technology.

Separations were typically carried out using an electric field strength
sufficient to facilitate migration and separation of biological molecules. The electric field
45 30 was generated using a power supply configured to apply a voltage differential at two spaced
apart regions of a supported gel matrix. Preferably, the electric field strength is between
about 50 V/cm and about 300 V/cm. More preferably, the electric field strength is between

about 100 V/cm and about 200 V/cm. Most preferably, the electric field strength is between about 125 V/cm and about 175 V/cm.

In one embodiment, the support is a mold for slab gels. The mold has a cavity to accommodate the gel matrix of the present invention in slab form. This embodiment encompasses the use of all commonly used molds which hold electrophoresis media for use in slab gel electrophoresis.

In another embodiment, the support is a capillary tube. Any capillary having sufficient length, inner diameter, and outer diameter to facilitate electrophoretic separations of biological molecules may be used. The capillaries may be composed of any inert material, and preferably, capillaries are fused-silica capillaries. Typical capillaries are those having internal diameters of less than about 200 μm , outer diameters of between about 100 and 500 μm , and lengths of between about 10 cm to 150 cm. Preferably, the capillaries have internal diameters of between about 25 μm and 150 μm , outer diameters of between about 200 and 400 μm , and lengths of between about 30 cm to 110 cm. More preferably, the capillaries have internal diameters of between about 50 μm and 100 μm , outer diameters of between about 250 and 365 μm , and lengths of between about 55 cm to 80 cm.

In another embodiment, the support is a micromachined channel. In particular, this support comprises etched grooves on an inert surface, such as silica or silicon, and the grooves contain the gel matrices of the present invention. Furthermore, the micromachined channel contains a path for the electrophoretic separation biological molecules.

An advantage of the present invention is the flexible optimization of the chemical, physical, and sieving properties by the careful selection of the comonomers and ratios of comonomers. Depending on the needs of a particular separation, a gel matrix may be prepared using random linear copolymers of the present invention that have desired properties to enable effective separations of biological molecules. For example, separations using uncoated capillaries inevitably lead to electroendosmosis, where the gel matrix migrates within the capillary tube. As a consequence, separation of biological molecules is not efficient, accurate or reproducible. The use of a gel matrix containing random copolymers with self coating properties allows the gel matrix to adsorb onto the silica of the capillary tube, thereby suppressing electroendosmotic flow.

5 The invention is further defined by reference to the following examples,
describing in detail the preparation of the compound and the compositions of the present
invention, as well as their utility. It will be apparent to those of ordinary skill in the art that
many modifications, both to materials and methods, may be practiced without departing
10 from the purpose and interest of this invention.
5

15 EXAMPLES

10 EXAMPLE 1: Preparation of 5.0% DMA + 0.5% AA Gel Matrix.

1xTBE, 6 M buffer was prepared by dissolving 89 millimoles (mM) of
tris(hydroxymethyl)aminomethane (Tris), 2 mM ethylenediaminetetraacetic acid (EDTA),
20 and 6 moles of urea to 1 L of deionized water. 50 mL 1xTBE, 6 M urea buffer was
transferred to a 250 mL PYREX bottle. 5.0 g dimethyl acrylamide (DMA) and 0.5 g
15 sodium acrylate (NaAA) were weighed and added to the buffer solution. The final volume
was brought up to 100 mL with additional buffer solution. The solution was degassed for
25 30 minutes in a desiccator chamber with its outlet connected to a diaphragm vacuum pump.
After degassing, 25 μ L of N,N,N',N'-tetramethylethylenediamine (TEMED) and 25 μ L of
30 40% (v/v) ammonium persulfate (ASP) were added to the solution. The bottle was capped,
20 and the polymerization was carried out at room temperature for 12 hours.

35 EXAMPLE 2: Preparation of 3.5% AAm and 1.5% DMA Gel Matrix.

1xTBE, 7 M buffer was prepared by dissolving 89 mM of Tris, 2 mM
EDTA, and 7 moles of urea to 1 L of deionized water. 19 mL of 1xTBE, 7 M urea buffer
25 was transferred to a 20 mL scintillation vial. 0.30 g of DMA and 0.70 g acrylamide (AAm)
were weighed and added to the buffer solution. Helium was bubbled into the solution at 10
40 psi for 1 hour. After degassing, 25 μ L of TEMED and 25 μ L of 40 % (v/v) ASP were
added to the solution. The bottle was capped, and the polymerization was carried out at
room temperature for 12 hours. .

30

45 EXAMPLE 3: Preparation of 2.5% AAm and 2.5% DMA Gel Matrix.

5 1xTBE, 7 M buffer was prepared by dissolving 89 mM of Tris, 2 mM
EDTA, and 7 moles of urea to 1 L of deionized water. 19 mL of 1xTBE, 7 M urea buffer
was transferred to a 20 mL scintillation vial. 0.50 g of DMA and 0.50 g AAm were
weighed and added to the buffer solution. Helium was bubbled into the solution at 10 psi
10 5 for 1 hour. After degassing, 25 μ L of TEMED and 25 μ L of 40 % (v/v) ASP were added to
the solution. The bottle was capped, and the polymerization was carried out at room
temperature for 12 hours.

15 EXAMPLE 4: Preparation of 4.5% AAm and 0.5% DMA Gel Matrix.

10 1xTBE, 7 M buffer was prepared by dissolving 89 mM of Tris, 2 mM
EDTA, and 7 moles of urea to 1 L of deionized water. 19 mL of 1xTBE, 7 M urea buffer
was transferred to a 20 mL scintillation vial. 0.90 g of AAm and 0.10 g DMA were
20 weighed and added to the buffer solution. Helium was bubbled into the solution at 10 psi
for 1 hour. After degassing, 25 μ L of TEMED and 25 μ L of 40 % (v/v) ASP were added to
15 the solution. The bottle was capped, and the polymerization was carried out at room
25 temperature for 12 hours.

EXAMPLE 5: Preparation of 3.0 % AAm + 1.0 % DMA + 0.06 % AA Gel Matrix.

20 1xTBE, 7 M buffer was prepared by dissolving 89 mM of Tris, 2 mM
EDTA, and 7 moles of urea to 1 L of deionized water. 50 mL of 1xTBE, 7 M urea buffer
was transferred to a 250 mL PYREX bottle. 3.0 g of AAm, 1.0 g DMA and 0.06 g NaAA
30 were weighed and added to the buffer solution. The final volume was brought up to 100
mL with additional buffer. Helium was bubbled into the solution at 10 psi for 1 hour. After
35 degassing, 25 μ L of TEMED and 25 μ L of 40 % (v/v) ASP were added to the solution. The
25 bottle was capped, and the polymerization was carried out at room temperature for 12 hours.

40 EXAMPLE 6: Preparation of 3.0 % AAm + 1.0 % DMA + 0.06 % AA Gel Matrix.

30 1xTBE, 3.5 M buffer was prepared by dissolving 89 mM of Tris, 2 mM
EDTA, and 7 moles of urea to 1 L of deionized water. 50 mL of 1xTris, 3.5 M urea buffer
was transferred to a 250 mL PYREX bottle. 3.0 g of AAm, 1.0 g DMA and 0.06 g NaAA
45 were weighed and added to the buffer solution. The final volume was brought up to 100
mL with additional buffer. Helium was bubbled into the solution at 10 psi for 1 hour. After

5 degassing, 25 μ L of TEMED and 25 μ L of 40 % (v/v) ASP were added to the solution. The bottle was capped, and the polymerization was carried out at room temperature for 12 hours.

10 EXAMPLE 7: Viscosity Measurement gel matrices containing 5% of the random copolymer, poly(acrylamide)_x-co-(N,N-dimethylacrylamide)_{1-x} in water.

Figure 1 shows the measured viscosities of gel matrices containing 5% of the random copolymer, poly(acrylamide)_x-co-(N,N-dimethylacrylamide)_{1-x} in water as a function of weight fraction of acrylamide ("AAM"). The viscosity measurement was done by using the falling-ball method. The weight fractions of AAM to the total weight of monomers, AAM, and N,N-dimethylacrylamide ("DMA") were varied in the series of copolymers such that the total monomer concentration stays at a constant 5%. Viscosity measurements were taken at a temperature of 22°C. The viscosity of the polymer solution can be tuned in the range of more than three orders of magnitude. The plot in Figure 1 clearly shows that the effect of increasing the ratio of AAM causes an increase in the viscosity of the gel.

EXAMPLE 8: Hydrophilicity Measurements.

Hydrophilicities of monomers have been measured with the partition coefficients between water and n-octanol after vigorous stirring. Upon equilibration, the monomer quantity of the aqueous phase was weighed after the water was evaporated. The partition coefficients of the monomers, AAM, and DMA in aqueous phase are 0.80 and 0.50, respectively. As shown in Figure 2, the DMA polymer (weight fraction of AAM = 0, relative hydrophilicity = 0.5 a.u.) has a hydrophilicity less than that of AAM polymer (weight fraction of AAM = 1, relative hydrophilicity = 2 a.u.). The hydrophilicities were studied by the same method. The gel containing 5 % poly(acrylamide)_x-co-(N,N-dimethylacrylamide)_{1-x}, in which different ratios of AAM and DMA were used, was synthesized in water. The resulting copolymer was diluted to 1 %, and then an appropriate amount of n-octanol was added to make a 3:7 n-octanol/water ratio by volume. The resulting copolymer solution was vigorously stirred at 600 rpm for two hours. The solution was then allowed to sit at ambient conditions for another two hours to separate the organic phase from the aqueous phase, and the organic phase was collected. A reference sample of water and n-octanol with the same volume, in the absence of polymer, were treated with the

5 same procedures as the 1 % copolymer in 3:7 n-octanol/water. The volume loss of n-octanol, defined as the volume difference between the reference sample and copolymer samples, shows the volume of n-octanol that has been taken up by the copolymers. The reduced volume loss of n-octanol indicates that polymer is more hydrophilic. Figure 2
10 5 shows a plot of the ratio of copolymer weight (g) to the n-octanol volume loss (mL), which represents the relative hydrophilicity of the copolymers. It is clear from this plot that an increase in the weight fraction of AAM increases the hydrophilicity of the gel.

15
10 **EXAMPLE 9: The Separation of PGEM/U DNA Sequencing Samples using (3.5 % DMA + 1.5 % AAm) Copolymer Gel in Uncoated and Coated μ FC Capillaries.**

PGEM/U DNA sequencing samples were separated using (3.5 % DMA + 1.5 % AAm) Copolymer Gel in Uncoated and Coated μ FC Capillaries.

20 **A. Preparation of Electrophoretic gels.**

The (3.5 % DMA + 1.5 % AAm) Copolymer Gel was prepared by the
15 following procedure:

19 mL 1xTBE, 7 M urea buffer was transferred to a 250 mL PYREX bottle. 0.7 g dimethyl acrylamide (DMA) and 0.3 g acrylamide (AAm) were weighed and added to the buffer solution. The solution was bubbled with helium for 60 minutes at 10 psi. After purging, 5 μ L of N,N,N',N'-tetramethylethylenediamine (TEMED) and 5 μ L of 40% (v/v)
30 20 ammonium persulfate (ASP) were added to the solution. The bottle was capped, and the polymerization was carried out at room temperature for 12 hours.

B. Capillary Electrophoresis Apparatus.

35 Separations of the DNA samples were carried out using a capillary electrophoresis apparatus equipped with a laser induced fluorescence detector. Figure 3 is a schematic drawing of the capillary electrophoresis apparatus, showing a polycarbonate
25 board that provides the mounting base for the other components, including the capillary array, detection window mount, high pressure fitting, and electrode boards holding individual electrodes for each capillary.

The fused-silica capillaries are typically 55-80 cm in length, with a 75 μ m
30 45 inner diameter and 200-365 μ m outer diameter. The capillary array consisting of 2-96 capillaries is arranged in a flat ribbon format. At a distance of about 20 cm from one end of the capillary array, the polyimide coating of the capillaries is stripped off by hot wire

5 heating to create a 1.5 to 2 cm wide translucent window for laser excitation and
fluorescence light collection.

The detector module is mounted above the translucent window to
simultaneously monitor all the capillaries. An incoming laser beam perpendicular to the
10 drawing plane intersects with all the capillaries and excites fluorescence from the
5 bypassing fluorophore samples migrating within the capillaries.

Gel filling of the capillaries is done by connecting the capillaries to a gel
filling tube, and applying a nitrogen or helium gas pressure of between 100 to 500 psi for 5
15 to 60 minutes, depending on the gel viscosity. For capillary flushing, the end of the
capillaries are connected to an HPLC pump and are typically flushed at 500 to 1000 psi
10 with an aqueous 0.2 % poly(vinylpyrrolidone) solution for 30 to 60 minutes after each run.

An array of 4 to 16 capillaries were used. Uncoated capillaries were
20 purchased from Polymicro Technologies, and coated μ FC capillaries were purchased from
J&W Scientific.

15 C. DNA Samples.

The DNA sequencing samples were PGEM/U samples prepared with the
25 BIGDYE terminator sequencing kit (Perkin-Elmer, Applied Biosystems Division, Foster
City, CA). The samples were purified with spin columns and dried under vacuum. Prior to
electrophoresis, the sample was resuspended in 5 μ L of formamide and 25 mM EDTA
30 mixed denaturing solution. The sample was heated at 95°C for 2 minutes and chilled on ice
prior to electrokinetic injection into the capillary. Typically, the sample was injected in an
environment having a 75 V/cm electric field with a duration of 40-60 seconds. All
35 separations were performed using a 150 V/cm electric field.

25 D. PGEM/U Separations using (3.5 % DMA + 1.5 % AAm) Copolymer Gel in
Uncoated and Coated μ FC Capillaries.

Uncoated and coated capillaries were filled with (3.5 % DMA + 1.5 %
40 AAm) Copolymer Gel according to the methods described above. Figure 4A shows the
separation of PGEM/U in the coated capillary, and Figure 4B shows the separation of
30 PGEM/U in the uncoated capillary. The μ FC coating of the coated capillaries function to
suppress electroendosmotic flow. The retention times of the 210-213 peaks in both
45 separations are nearly identical (ca. 3300 frame numbers in Figure 4A, and ca. 3360 frame

5

numbers in Figure 4B). This suggests that the copolymer gel effectively suppresses electroosmotic flow by adsorbing onto the silica surface of the uncoated capillary tube.

10

15

20

25

30

35

40

45

50

55

THE CLAIMS

5

What is claimed is:

10

15

20

25

30

35

40

45

50

55

1. An electrophoresis separation medium comprising a gel matrix of at least one random, linear copolymer comprising a primary comonomer and at least one secondary comonomer, wherein the comonomers are randomly distributed along the copolymer chain, wherein the primary comonomer is an acrylamide or an acrylamide derivative and the at least one secondary comonomer comprises one from the group consisting of vinyl monomers, monomers of acrylamide derivatives, monomers of acryloyl derivatives, monomers of acrylic acid derivatives, monomers of polyoxides, monomers of polysilanes, monomers of polyethers, monomers of derivatized polyethylene glycols, monomers of cellulose compounds, or mixtures thereof, each having between 2-24 carbon atoms.
2. The electrophoresis separation medium of claim 1, wherein the primary comonomer is acrylamide and the at least one secondary comonomer is dimethylacrylamide.
3. The electrophoresis separation medium of claim 1, wherein the ratio of reactivity of the at least one secondary comonomer to said primary comonomer is between 0.3 and 2.0.
4. The electrophoresis separation medium of claim 1, wherein said gel matrix further comprises a buffer having a pH between 5 and 11.
5. The electrophoresis separation medium of claim 1, wherein said gel matrix has a viscosity between 100 and 50,000 Cp.
6. The electrophoresis separation medium of claim 1, wherein said at least one linear random copolymer has a molecular weight between 100,000 and 5,000,000 Daltons.

5 7. The method of claim 1, wherein said at least one secondary
comonomer imparts one or more of hydrophilicity, hydrophobicity, copolymer chain
backbone stiffness, self coating properties, stability of copolymer entanglement structure,
10 resistance to hydrolysis, processivity of copolymer chain extension, gel matrix viscosity,
5 affinity of the copolymer to the surface of a supporting substrate, or chirality.

15 8. A method of preparing an electrophoresis separation medium
comprising a gel matrix of at least one random, linear copolymer comprising a primary
comonomer and at least one secondary comonomer, wherein the comonomers are randomly
10 distributed along the copolymer chain, wherein the primary comonomer is an acrylamide or
an acrylamide derivative and the at least one secondary comonomer comprises one from
20 the group consisting of vinyl monomers, monomers of acrylamide derivatives, monomers
of acryloyl derivatives, monomers of acrylic acid derivatives, monomers of polyoxides,
monomers of polysilanes, monomers of polyethers, monomers of derivatized polyethylene
15 glycols, monomers of cellulose compounds, or mixtures thereof, each having between 2-24
25 carbon atoms, said method comprising
contacting said primary and the at least one secondary comonomers in the presence
of a copolymerization initiator in an aqueous medium having a pH of between 5 and 11 at a
30 temperature and time sufficient to copolymerize the comonomers and form a linear,
20 random copolymer, and contacting said linear, random copolymer with a buffer.

35 9. The method of claim 8, wherein the primary comonomer is
acrylamide and the at least one secondary comonomer is dimethylacrylamide.

40 10. The method of claim 8, wherein the ratio of reactivity of the at least
25 one secondary comonomer to said primary comonomer is between 0.3 and 2.0.

45 11. The method of claim 8, wherein said gel matrix further comprises a
30 buffer having a pH between 5 and 11.

50 12. The method of claim 8, wherein said gel matrix has a viscosity
55 between 100 and 50,000 Cp.

5 13. The method of claim 8, wherein said at least one linear random copolymer has a molecular weight between 100,000 and 5,000,000 Daltons.

10 14. A capillary tube filled with an electrophoresis separation medium comprising gel matrix of at least one random, linear copolymer comprising a primary comonomer and at least one secondary comonomer, wherein the comonomers are randomly distributed along the copolymer chain, wherein the primary comonomer is an acrylamide or an acrylamide derivative and the at least one secondary comonomer comprises one from
15 the group consisting of vinyl monomers, monomers of acrylamide derivatives, monomers of acryloyl derivatives, monomers of acrylic acid derivatives, monomers of polyoxides,
20 monomers of polysilanes, monomers of polyethers, monomers of derivatized polyethylene glycols, monomers of cellulose compounds, or mixtures thereof, each having between 2-24 carbon atoms.

15 15. The capillary tube of claim 14, wherein the primary comonomer is acrylamide and the at least one secondary comonomer is dimethylacrylamide.

30 16. The capillary tube of claim 14, wherein the ratio of reactivity of the at least one secondary comonomer to said primary comonomer is between 0.3 and 2.0.

20 17. The capillary tube of claim 14, wherein said gel matrix further comprises a buffer having a pH between 5 and 11.

35 18. The capillary tube of claim 14, wherein said gel matrix has a
25 viscosity between 100 and 50,000 Cp.

40 19. The capillary tube of claim 14, wherein said at least one linear random copolymer has a molecular weight between 100,000 and 5,000,000 Daltons.

30 20. A method of separating a mixture of biological molecules within an
45 electrophoretic separation medium comprising:

- 5 a) placing into a support a gel matrix of at least one random, linear
copolymer comprising a primary comonomer and at least one secondary comonomer,
wherein the comonomers are randomly distributed along the copolymer chain, wherein the
primary comonomer is an acrylamide or an acrylamide derivative and the at least one
10 5 secondary comonomer comprises one from the group consisting of vinyl monomers,
monomers of acrylamide derivatives, monomers of acryloyl derivatives, monomers of
acrylic acid derivatives, monomers of polyoxides, monomers of polysilanes, monomers of
polyethers, monomers of derivatized polyethylene glycols, monomers of cellulose
15 compounds, or mixtures thereof, each having between 2-24 carbon atoms.
- 10 b) adding the mixture of biological molecules to the electrophoretic
separation medium at one end of the support; and
- 20 c) applying an electric field to the medium in an amount sufficient to
facilitate the migration and separation of the biological molecules.

15 21. The method according to claim 20, wherein the primary comonomer
25 is acrylamide and the at least one secondary comonomer is dimethylacrylamide.

30 22. The method according to claim 20, wherein the ratio of reactivity of
the at least one secondary comonomer to said primary comonomer is between 0.3 and 2.

20 23. The method according to claim 20, wherein said gel matrix further
comprises a buffer having a pH between 5 and 11.

35 24. The method according to claim 20, wherein said gel matrix has a
25 viscosity between 100 and 50,000 Cp.

40 25. The method according to claim 20, wherein said at least one linear
random copolymer has a molecular weight between 100,000 and 5,000,000 Daltons.

30

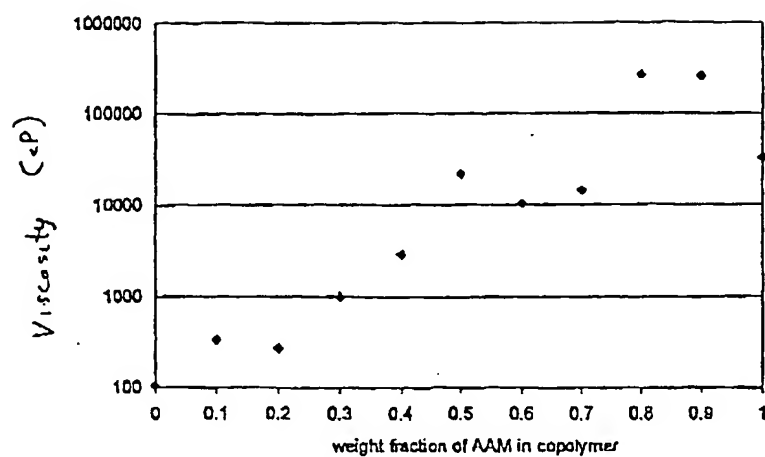


Figure 1.

Viscosity of 5% copolymer in water
as a function of AAM weight fraction



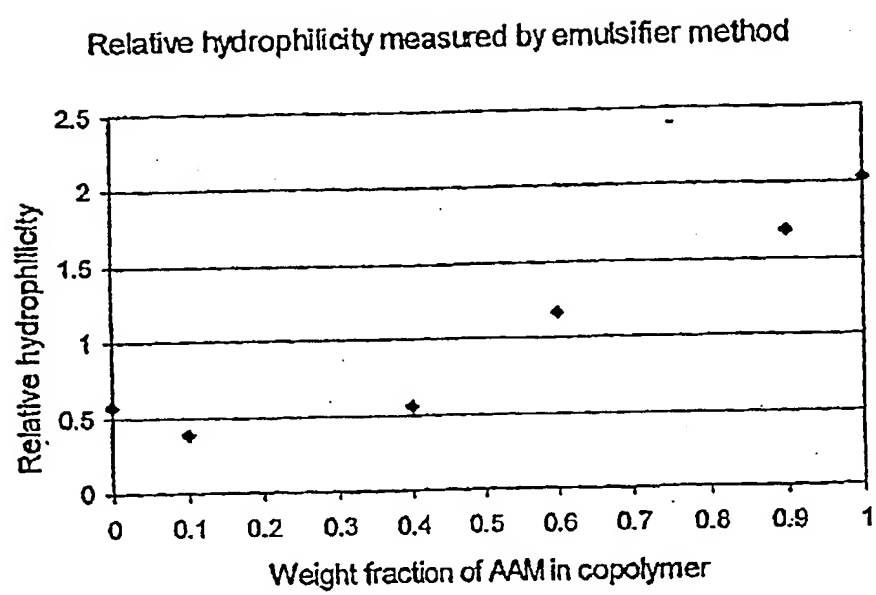


Figure 2

*Figure 3*

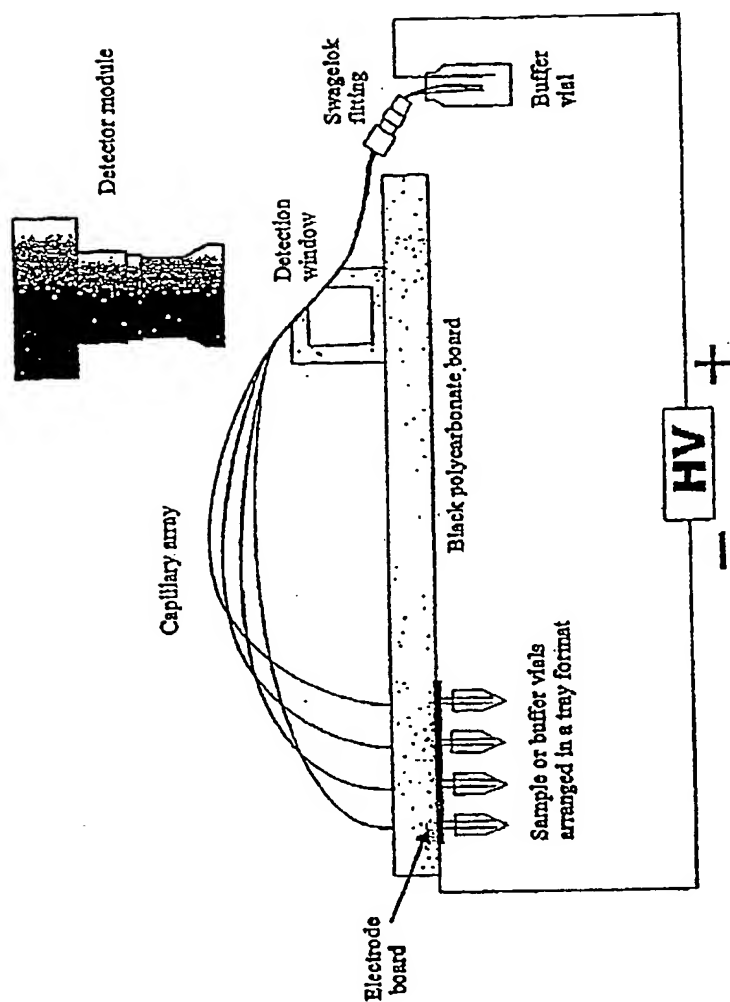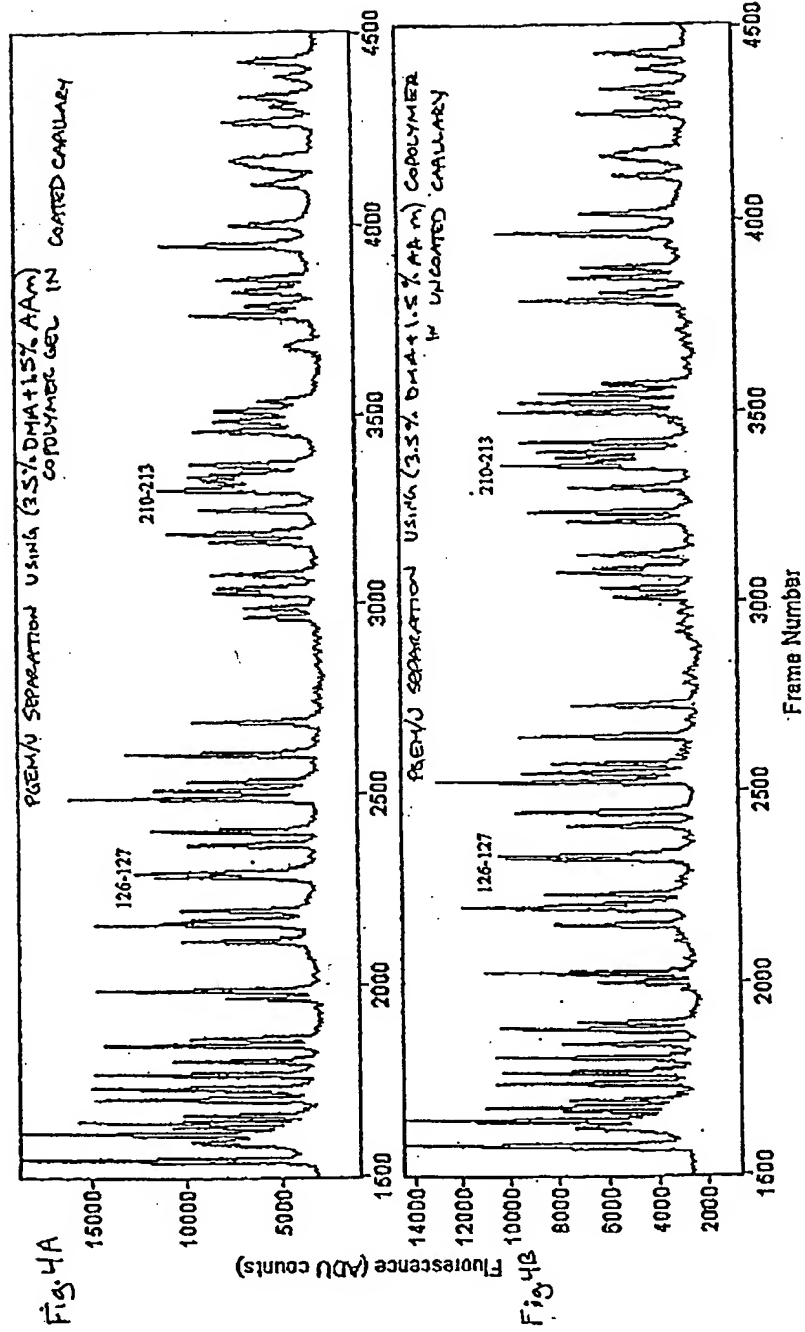

Figures 4A(top) and 4B (bottom)

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US00/00793

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : G01N 27/26, 27/447

US CL : 204/455, 469, 605

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 204/451.452, 453,455,6, 469, 601, 602, 603, 604, 605

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WEST-USPAT

search terms: electrophor\$4, (random near 5 (copolymer or (co adj polymer)), acrylamide, polyacrylamide

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	US 5,885,432A(HOOPER et al) 23 March 1999, see entire document	1-25



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*Y* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*A* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

28 MARCH 2000

Date of mailing of the international search report

18 APR 2000

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Authorized officer

JOHN S. STARSIAK JR.

DEBORAH THOMAS
PARALEGAL SPECIALIST